







1  ✓ OK


2  ✓ OK


3  ✓ OK


4  max. 280°C


5  X not OK


6  X not OK


7  X not OK


8  X not OK


9  ✓ OK


10  ✓ OK


11  ✓ OK


12  ✓ OK


1  ✓ OK


2  X not OK

3  1x > 2h ✓ OK

4  ✓ OK

5  X not OK

6  X not OK

7  ≈ 60°C

## BLANCO SUBLINE-F SILGRANIT® PuraDur® II



BLANCO GmbH + Co KG  
Technischer Kundendienst  
Tel.: +49 7045 44-81 419  
www.blanco-germany.com

# BLANCO



Art.-No.: 511 935



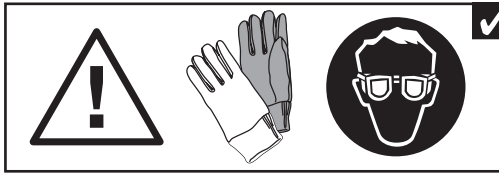
Art.-No.: 513 605

230969 - 08/2013





OK  
 not OK



	+1 mm / -1 mm		+2 mm / -1 mm		C	D
	A	B	E	F		
BLANCO SUBLINE 320-F	349 mm	429 mm	339 mm	419 mm	174 mm	109 mm
BLANCO SUBLINE 340/160-F	554 mm	429 mm	544 mm	419 mm	187 mm	369 mm
BLANCO SUBLINE 400-F	429 mm	429 mm	419 mm	419 mm	214 mm	149 mm
BLANCO SUBLINE 500-F	529 mm	429 mm	519 mm	419 mm	264 mm	199 mm

